

## WINDPRO GO



## ECONOMICAL SIDEWALK SIGN SUITABLE FOR THE MOST POPULAR POSTER SIZE

WindPro Go is heavy and robust waterbase pavement sign for outdoor and indoor use. It consists of 2 main articles: frame and the base. No sharp edges and has steel springs for flexibility. Poster use is double sided. Recommended to use with foil posters.

## KEY SELECTION ATTRIBUTES

- \* Double-sided Pavement Sign with swinging steel spring design for flexibility and stability.
- \* Practical, portable, user-friendly and economic.
- \* Patent protected (EUIPO / 015069741-0001, 015069741-0002, 015069741-0003; 015069741-0004) WindPro Go is heavy and robust pavement sign with 2 main parts: frame and the water base.
- \* OUTDOOR FRIENDLY & WIND RESISTANT: Suitable for windy outdoor conditions. This product is not waterproof, but suitable for both outdoor and indoor conditions. For outdoor use, it is recommended to use with foil posters.
- \* Easy and quick poster change with snap-open frame design. Suitable for silk screen printing, max. letter height on frame is 1.1" and printing area on base is 11.81"x3.15"(h)mm.
- \* One set includes a double sided snap open 1.3" aluminium profile swing frame with 1.06" depth and soft corners for safety, 2 anti-reflex PET poster covers, 1

strong PP backing, heavy water base with 2 wheels for easy transportation and fixing set for installation.

\* Ground wheels enable easy movement of the product. It is recommended to carry the product with a carry tool, when the base is full with water. Carry tool is optional, not included in package, should be ordered separately.

\* Blow molded HDPE base is suitable up to use -20°C. Heavy water base provides stability. Base weight 7.72 lbs. Water capacity 41.89 lbs. Base weight when filled with water 49.6 lbs.

\* Natural silver-anodized, black in standard and various RAL colors available with antimicrobial powder coating. Waterbase standard in dark grey color or black, other colors are available upon request.

\* Packed in 2 boxes with an easy mounting instruction sheet & fixing set. Assembly in 40-50 seconds.



## COLOURS IN STOCK



Silver

Black

## WATCH VIDEO



Watch video at our website  
www.mtdisplaysllc.com

## COLOUR OPTIONS

Black Anodised

Silver Anodised

Red- RAL 3020

## SUITABLE FOR

Windpro Go can be used for INDOOR and OUTDOOR applications, for signage needs in many locations like shopping centers, markets, groceries, hotels, offices airports, shops and stores, hospitals, schools, apartments and many more.


## FEATURES



Water Capacity 19lt




2 Wheels



Safe Corners



Antiflex Pet Protection



Steel Spring

## EXPLODED VIEW

632 mm




879 mm

Wheels

Optional carry tool.  
UYUP480945

## TECHNICAL DRAWING

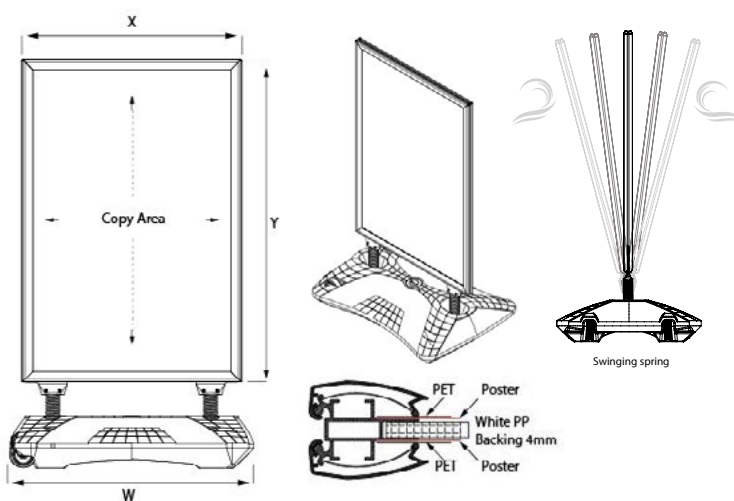

## ARTICLES

SILVER	BLACK	EXTERNAL	POSTER	COPY	H	W	D
USWPG00N24	USWPG00B24	25.51" X 37.51"	24" X 36"	23.14 X 35.15"	47.51"	28.34"	20.86"

WEIGHT	PACKING SIZE
WITH PACKING	*W X H X D
19 lb	26.37" X 40.94" X 1.77" / 22.04 X 29.13" X 6.8"



T: +1 855-478-0652 / info@mtdisplaysllc.com / www.mtdisplaysllc.com

# PRINT TEMPLATES

## Easy Go A Board - 24" x 36"

Document Size: 24.4" x 36.4" (Includes Bleeds)

Finished Size: 24" x 36" (609.6 x 914.4 mm) [Print](#)

## PHYSICAL DATA

### Material

1.3" aluminium profile snap open swing frame, PET anti-reflex poster cover, PP backing and blow molded HDPE base.

### Poster Material & Thickness

Recommended to use foil posters. 0.0039" – 0.0078" for standard product. Max poster thickness is 0.08" for low density rigid posters such as PVC foam, PP, etc. Any non-standard poster thickness should be indicated with order.

### Surface Finish

Natural silver-anodized, black in standard and various RAL colors available with antimicrobial powder coating. Base standard in dark grey color or black, other colors are available upon request. Call for custom color requests.

### Recycled Content

For frame part up to 78% and for base part up to 40% recycled content used.

### Warranty

All products are guaranteed for 2 years by MT Displays with below conditions:

[Warranty Conditions](#)

### Installation Considerations

WindPro Go is packed 2 boxes with an easy mounting instruction sheet & fixing set. Assembly in 40-50 seconds. One set includes a double sided snap open 1.3" aluminium profile swing frame with 1.06" depth and soft corners for safety, 2 anti-reflex PET poster covers, 1 strong PP backing, heavy water base with 2 wheels for easy transportation and fixing set for installation. Ground wheels in upside position enable easy movement of the product. It is recommended to carry the product with a carry tool, when the base is full with water. Carry tool is optional, not included in package, should be ordered separately.

### Storage Conditions

Goods should be stored at 32° to 77°F in a dry place. Store in the original package.

### Cleaning and Disinfecting

Clean your displays, with damp microfiber clothes, rinsed with simply water or warm, soapy or gentle shampooed water. Avoid using vinegar, abrasive, acidic, alcohol-based or heavy cleaners or cleaners containing Ammonia. Only after cleaning the product, if needed, simply apply disinfectant or sanitizer that is in compliance with your local guidelines and regulations.

### Design Considerations

Double-sided Pavement Sign with swinging steel spring design for flexibility and stability. Practical, portable, user-friendly and economic. Patent protected (EUIPO / 015069741-0001, 015069741-0002, 015069741-0003; 015069741-0004) WindPro Go is heavy and robust pavement sign with 2 main parts: frame and the water base. OUTDOOR FRIENDLY & WIND RESISTANT: Suitable for windy outdoor conditions. This product is not waterproof, but suitable for both outdoor and indoor conditions. For outdoor use, it is recommended to use with foil posters. Easy and quick poster change with snap-open frame design. Suitable for silk screen printing, max. letter height on frame is 1.1" and printing area on base is 11.81"x3.15". Blow molded HDPE base is suitable up to use -20°C. Heavy water base provides stability. Base weight 7.72 lbs. Water capacity 19lt. Base weight when filled with water 49.6 lbs.



# INSTALLATION INSTRUCTIONS

Windpro Go / 1009758H000



• Please inform the order number on the product or on the carton (e.g. 1/110001394-460) to the place that you have made the purchase if any problem with the product occurs.

• All rights reserved. All pictures, figures and writings are secured, internationally by copy-right law. Infringements will be sued by civil and legal law.



This technical sheet's contents are all subject to update and modification at MT Displays' exclusive discretion. There is nothing official about this document. For final and legally binding information, please get in touch with the sales staff at MT Displays.

Issue: 01 - 11/2024



T: +1 855-478-0652 / [info@mtdisplaysllc.com](mailto:info@mtdisplaysllc.com) / [www.mtdisplaysllc.com](http://www.mtdisplaysllc.com)