

DOUBLE SIDED SIDEWALK SIGNS WITH FLEXIBLE SPRING AND WATERWICK DESIGN

With increase performance, WindPro® Plus is more durable against outdoor conditions. It consists of 2 main articles: frame and the base. The gasket in frame provides high vacuuming to UV resistant poster protection to keep the poster dry. PET is fixed on the top profile to help easy poster change. The poster stickers which is suitable for re-use upto100 times are also keep the poster in place avoid sliding down the frame get wet. No sharp edges and has steel springs for flexibility. Poster use is double sided.

KEY SELECTION ATTRIBUTES

- * Double-sided Pavement Sign with swinging steel spring design for flexibility and stability.
- * Patent protected (PCT/EP2018/060515) WindPro Plus is heavy and robust pavement sign for OUTDOOR use with 2 main parts: frame and the waterbase.
- * Weatherproof & Wind Resistant: Suitable for windy outdoor conditions and rainy conditions with a rubber seal around the frame for protecting the poster within.
- * Suitable for 22"x28", 24"x36", 30"x40", 20"x30" poster sizes.
- * One set includes a double sided snap open 1.73" aluminium profile swing master frame with 1.3" depth, adhesive poster tapes for avoiding sliding down, clear cover hangers and round mitred corners for safety, 2 anti-reflex PET poster covers, 1 strong PP backing, nuts, spanners, heavy water base profile with washers for installation.
- * Please place the poster on stickers inside the water wick around the inner frame. The gasket in frame provides high vacuuming to UV resistant poster protection to keep the poster dry. PET is fixed on the top profile to help easy poster change. The poster stickers are also keep the poster in place avoid sliding

down the frame and getting wet.

- * Optional header accessories are available upon request, not included in standard set. If the frame of WindPro Lite is required with a "HEADER" option, then the standard frames cannot be used, header enabled frames must be ordered. Please contact our sales department for the frames suitable for use with header.
- * Heavy waterbase provide stability.
- * Natural silver-anodized, black in standard and various RAL colors available with antimicrobial powder coating. Base standard in dark grey color or black, other colors are available upon request.
- * Packed unassembled with an easy mounting instruction sheet & fixing set. Assembly in 60 seconds.
- * Please use the wrench enclosed and tighten carefully. If tightened too much, the base can breach.











Black

COLOURS IN STOCK





COLOUR OPTIONS



Red- RAL 3020
Blue - RAL 5002
Green - RAL 6029
Yellow - RAL 1021

SUITABLE FOR

WindPro Lite can be used for INDOOR and OUTDOOR applications, for signage needs in many locations like shopping centers, markets, groceries, hotels, offices airports, shops and stores, hospitals, schools, apartments and many more.

WATCH VIDEO



Watch video at our website www.mtdisplaysllc.com

FEATURES












EXPLODED VIEW



TECHNICAL DRAWING

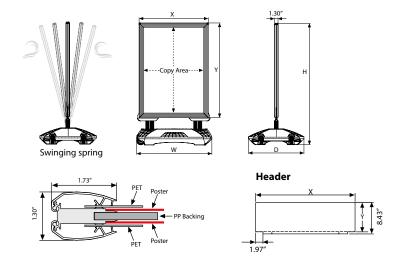

ARTICLES

FRAME					WEIGHT	PACKING SIZE
SILVER	BLACK	EXTERNAL (x-y)	POSTER	COPY	WITH PACKING	*W X H X D
USWPP00N23	USWPP00B23	23.03" X 33.03"	20" X 30"	19.53"X 29.53"	17.526 lbs	24.21" X 43.31" X 1.57"
USWPP00N34	USWPP00B34	33.03" X 43.03"	30" X 40"	29.53"X 39.53"	24.912 lbs	34.45" X 53.15" X 1.57"
USWPP00N22	USWPP00B22	25.03" X 31.03"	22" X 28"	21.53"X 27.53"	17.526 lbs	26.18" X 40.55" X 1.57"
USWPP00N24	USWPP00B24	27.03" X 39.03"	24" X 36"	23.53"X 35.53"	19.731 lbs	27.95" X 48.82" X 1.57"

OPTIONAL ACCESSORIES




ARTICLE	SIZE	PRINTING AREA (x-y)	WITH PACKING
UYFT005023	20" X 30"	23.03" X 7.87"	0.507 lbs
UYFT005024	30" X 40"	33.03" X 7.87"	0.738 lbs
UYFT005034	22" X 28"	25" X 7.87"	0.551 lbs
UYFT005046	24" X 36"	27.05" X 7.87"	0.595 lbs

WEIGHT

HEADER: 3 mm PVC Foam

SwingPro® Plus & WindPro® Plus header (3 PVC Foam)

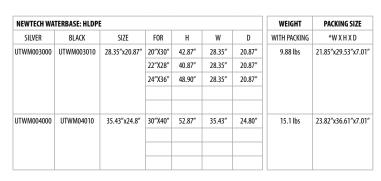





PHYSICAL DATA

Materia

1.73" aluminium profile snap open swing master frame, PET anti-reflex poster cover, PP backing, steel profile base. Optional PVC Foam headers

Poster Material & Thickness

0,0039" – 0,0078" with gasket/water wick for standard product. Max poster thickness is 0.078 for low density rigid posters such as PVC foam, PP, etc. Any non-standard poster thickness should be indicated with order.

Surface Finish

Natural silver-anodized, black in standard and various RAL colors available with antimicrobial powder coating. Base standard in dark grey color or black, other colors are available upon request. Call for custom color requests.

Recycled Content

For frame part up to 78% and for base part up to 40% recycled content used.

Warranty

All products are guaranteed for 3 years by MT Displays with below conditions: Warranty Conditions

Storage Conditions

Goods should be stored at 32° to 77°F in a dry place. Store in the original package.

Installation Considerations

Base standard in dark grey color or black. Other colors are available upon request. Ground wheels in upside position enable easy movement of the product. Please note that if the frame of SwingPro Plus and WindPro Plus is required with a "HEADER" option, then the standard articles cannot be used, please contact our sales department for the articles with a header option. Do not forget to order carry tool. Please place the poster on stickers inside the water wick around the inner frame. Do not forget to order carry tool. Assembly in 60 seconds.

Design Considerations

Double-sided Pavement Sign with swinging steel spring design for flexibility and stability. Patent protected WindPro Plus is heavy and robust pavement sign for OUTDOOR use with 2 main parts: frame and the base. Suitable for windy outdoor conditions and rainy conditions with a rubber seal around the frame for protecting the poster within. Suitable for 22"x28", 24"x36", 30"x40", 20"x30" poster sizes. Heavy waterbase provide stability.

Cleaning and Disinfecting

Clean your displays, with damp microfiber clothes, rinsed with simply water or warm, soapy or gentle shampooed water. Avoid using vinegar, abrasive, acidic, alcohol-based or heavy cleaners or cleaners containing Ammonia. Only after cleaning the product, if needed, simply apply disinfectant or sanitizer that is in compliance with your local guidelines and regulations.

Patent

OHIM DM/098 297, PCT/EP2018/060515

PRINT TEMPLATES

Windpro Plus - 20" x 30"

Document Size: 20.4" x 30.4" (Includes Bleeds) **Finished Size:** 20" x 30" (508 x 762 mm) **Print**

Windpro Plus - 22" x 28"

Document Size: 22.4" x 28.4" (Includes Bleeds) Finished Size: 22" x 28" (558.8 x 711.2 mm) Print Windpro Plus - 24" x 36"

Document Size: 24.4" x 36.4" (Includes Bleeds) **Finished Size:** 24" x 36" (609,6 x 914,4 mm) **Print**

Windpro Plus - 30" x 40"

Document Size: 30.4" x 40.4" (Includes Bleeds) **Finished Size:** 30" x 40" (762 x 1016 mm) **Print**



INSTALLATION INSTRUCTIONS

WindPro® Plus / 1010214H000

Poster Change















Each product package includes for Frame

- 1 x SwingPro Plus &
- WindPro Plus Frame
 2 x PET cover
 4 x Nut M10
 1 x 17 spanner

SwingPro Plus Steel Base



























Each product package includes for SwingPro Plus Steel Base • 2 x SwingPro side feet • 1 x Feet connection pipe • 2 x Feet bracket top

- 2 x Feet bracket bottom
- 2 x Washer

for WindPro Plus Water Base

- 1 x Water base 2 x Washer





Please inform the order number on the product or on the carton (e.g. 1/110001394-460) to the place that you have made the purchase if anyproblem with the product occurs.
 All rights reserved. All pictures, figures and writings are secured internationally by copy-right law. Infringements will be sued by civil and legal law.

- WARNING!

 Please use the wrench enclosed and tighten carefully When tighten too much, the base can breach.
- It is recommend to carry the product with the tool as shown (optional available), when the base is full with water.

This technical sheet's contents are all subject to update and modification at MT Displays' exclusive discretion. There is nothing official about this document. For final and legally binding information, please get in touch with the sales staff at MT Displays.

